

80X80CM

Glossy Finish ◀▶


COLLECTION 2018 / COLECCIÓN 2018
POLISHED GLAZED VITRIFIED TILES



SATVARIO PEARL



MECEDONIA

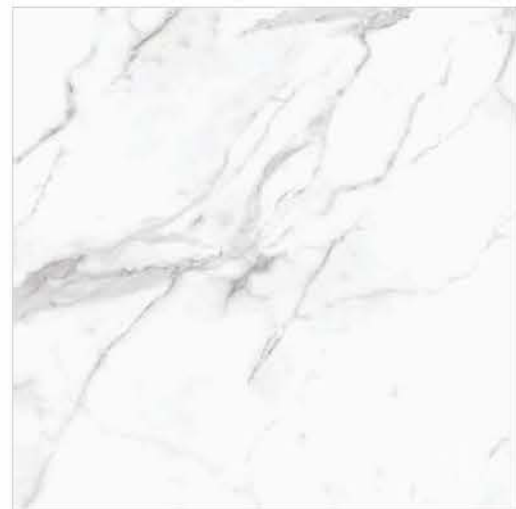

POLLONE WHITE



ANTISKY



ZENITH WHITE



ONYX IVORY



Preview of [POLLONE WHITE]

Page

13

Page

12

80X80CM

Glossy Finish ◀▶

COLLECTION 2018 / COLECCIÓN 2018
POLISHED GLAZED VITRIFIED TILES



VENTO

FANTASY BIANCO



VIVALDI

FANTASY CREMA



VALENTINO

FANTASY BROWN



Preview of { VIVALDI }

Page

15

Page

14

80X80CM

Glossy Finish ◀▶

COLLECTION 2016 / COLECCIÓN 2016
POLISHED GLAZED VITRIFIED TILES



NATURAL SLATE CREAM



LORENZO CREMA



ERAMOSA BEIGE




LORENZO BRONZE



ERAMOSA TOBACCO



LORENZO CHOCO

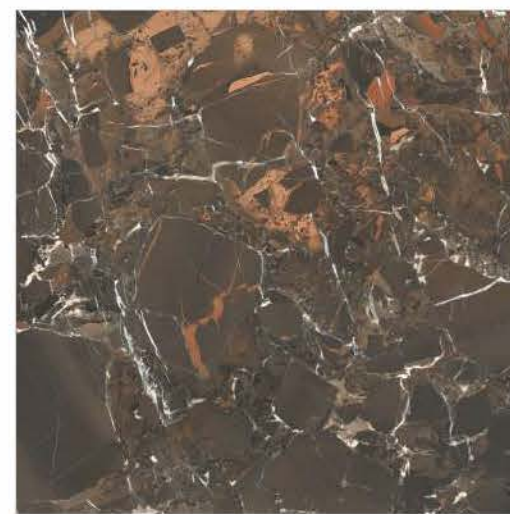

BIASCA BEIGE



Preview of [BIASCA BEIGE]

80X80CM

Matt Finish

COLLECTION 2018 / COLECCIÓN 2018
GLAZED VITRIFIED TILES



MY STONE CREMA

ILDUM WHITE




MY STONE CAFE

ILDUM CREMA



MY STONE CHOCO

ILDUM BEIGE

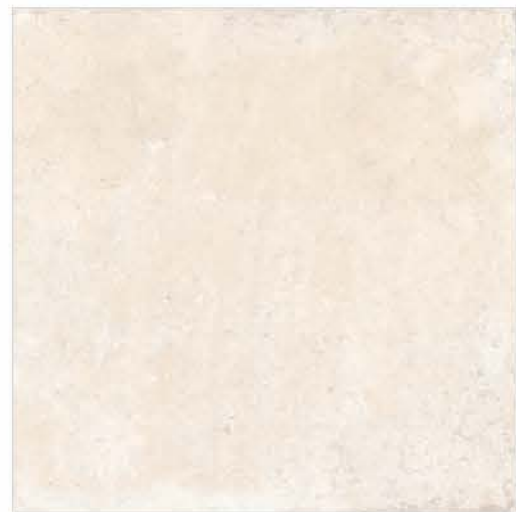


Preview of { MY STONE CAFE }

Page

80X80CM

Matt Finish

COLLECTION 2018 / COLECCIÓN 2018
GLAZED VITRIFIED TILES

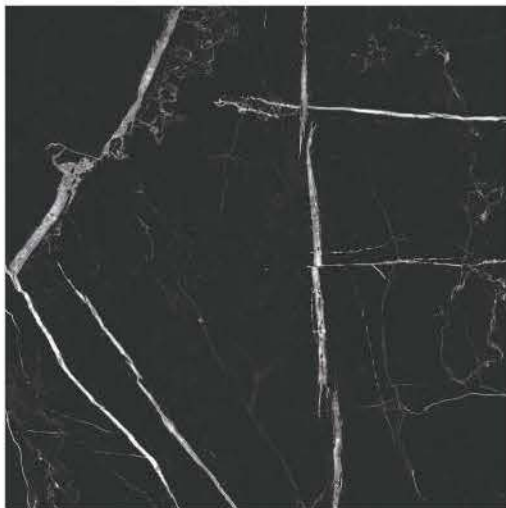

MY STONE BLACK



Preview of (MY STONE BLACK)

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13008/EN14411 GROUP B1a	MEAN VALUE OF OUR GVT	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Devlation In thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.06 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Molisture expansion	Nlll	Nlll	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg	Does not yield Pb & Cd	ISO-10545-15

Tile Size	Tiles / Box	Coverage Area / Box (approx.)	Wt. Kgs. / Box (approx.)
80x120cm	2 pcs.	1.92 sq. mtr.	53.00 kgs.
80x80cm	2 pcs.	1.28 sq. mtr.	34.00 kgs.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.